

规格承认书

APPROVAL SHEET






产品名称 Product Name	Cat 6 Socket
型号 Model	101670

出厂签章 (EX FACTORY APPROVALS)				
核准 APPROVED BY	审核 CHECKED BY	品管部 Q.A.	工程技术部 ENGINEERING	
吴周红	吴庄章	陈家春	车叶飞	
客户确认 (customer confirmation)				
	核准 APPROVED BY	审核 CHECKED BY	品管部 Q.A.	工程技术部 ENGINEERING
接受 accept				
驳回 reject				
	说明(Description):			

日期(Date): 2013-03-11

68NE3.692.005

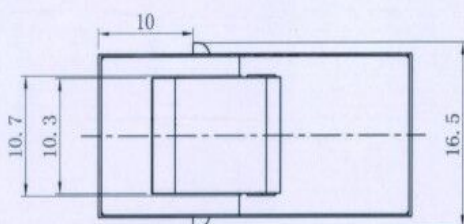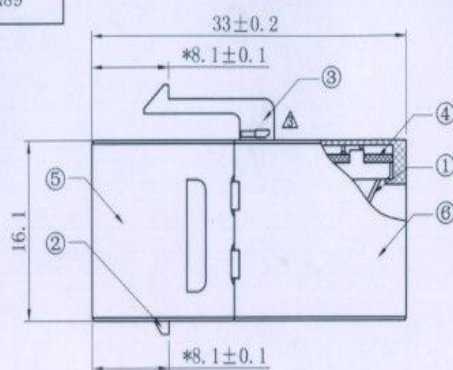

No:	更改标记及内容	日期
Rev1	增加长度	2011-6-3
2	更新3视图	15.1.28
△	增加泡点1.5*0.2*0.65	15.7.13

6	68NE8.075.003	屏蔽壳II	1		
5	68NE8.075.002	屏蔽壳I	1		
4	68NE7.820.001	印制板	1	FR-4 t=1.0	双面蓝油
3	68NE8.071.004	座	1		
2	68NE8.080.004	盖	1		
1	23NE6.620.002	插芯组件	2		
序号	图号	名称	数量	材料	备注

设计	工艺	标准化	校对	审核	批准	名称	网络连接器	材料	颜色	比例	视图
						产品型号				2:1	☐
						公司编码					
						客人代号					
						客人型号					

格式(1)

制图

描图

幅面: A4

型号 Item No.	101670	产品名称 Description	Cat 6 Socket
1. 额定值(rated value) 1.1 额定电压(The rated voltage) 30V 1.2 额定电流(Rated current)20mA 2 使用环境条件conditions 2.1 环境温度(temperature)：-23——+42℃ 2.2 相对湿度(humidity)：≤95 % 3 结构尺寸：（见图纸） 4 技术特性 Technical characteristics 4.1 环境测试条件(test conditions): 4℃—36℃，湿度(humidity) 60-95%，标准大气压下。(Under normal atmospheric pressure.) 4.2 物理性能(Physical) 4.21 制造标准：依据国际标准 ISO/IEC11801；TIA/EIA568 设计制造。 According to the international standard ISO/iec11801and; TIA/EIA568 design and manufacture. 4.22 IDC：磷青铜，镀锡，适用线径为 0.4~0.6mm，寿命不小于 200 次。 IDC Phosphor bronze, tin , Apply to wire diameter is 0.4 ~ 0.6 mm, 4.23 线插针：磷青铜，镀金（25uinch），插头可重复插拔不小于 750 次 Pin: phosphor bronze, gold plated , the plug can be inserted is not less than 750 times 4.24 面板材质为阻燃ABS，可通过V-0 级别 阻燃测试 The socket is made from V-0 material, And it can pass the fire resistance test 4.25 标识：标识完善、清晰 Marks: perfect and clear			

4.3 电气性能 Electrical properties

	项目 item	条件 Conditions	要求 requirements
	绝缘电阻 Insulation resistance	相互绝缘的接线之间，施加电压为 DC500±50V 作用时间 1 分钟 Applying 500 DC voltage between each other ,Last 1 minute	标准大气压下 ≥ 1000 兆欧 Under normal atmospheric pressure,More than 1000 megohm
	耐压 Withstand voltage	两相邻触点间能承受 AC250±50V 电压，作用时间为 1 分钟 Between two adjacent contacts to withstand 250 AC voltage, last time is 1 minutes	无击穿或飞弧 No breakdown or flashover
	插入力 Insertion force	标准大气压下 Under normal atmospheric pressure	插头和插孔之间承受压力强度，9.8N the Stress between plug and socket is no more than 9.8 N
	振动试验 Vibration test	标准大气压下 Under normal atmospheric pressure	频率范围: 10HZ-55HZ frequency range 10HZ-55HZ 速度幅值: 5m/s Velocity amplitude 5m/s 循环数: 20 Cycle count: 20

5.CAT 6 TEST

项目 item		条件 conditions	数据 date	结果result
TEST Limit: TIA Cat 6 Perm.Link Cable Type: Cat 6 UTP	Length(ft),limit 295	标准大气压下，用 FLUKE DTX-1800 测试仪抽样测试。 Under normal atmospheric pressure, with a FLUKE DTX - 1800 tester sampling test.	261	pass
	Prop.delay(ns),limit 498		398	pass
	Prop.skew(ns),limit 44		13	pass
	Resistance(ohms)		15.1	pass
	Insertion loss margin(dB)		3	pass
	Frequency(MHz)		100.0	pass
	Limit(dB)		21.0	pass

6: Packing

普通中性包装

Ordinary neutral packing