記號 MARK	ECN NO.	日 期 DATE	修 改 DRAW	核 准 APPROVE

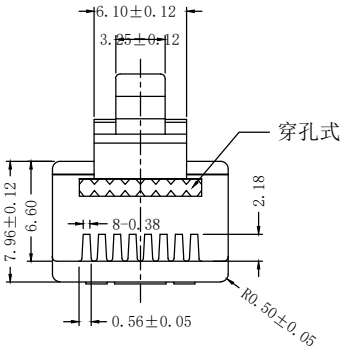

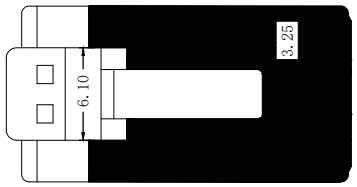

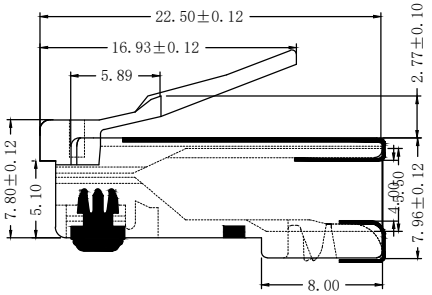



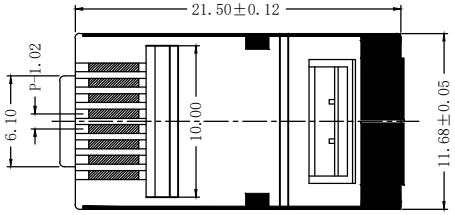

FEATURES:
1 Electrial Test:
A. Safety Voltage/Current Rating 150V ac, at 1.5A.
B. Dielectric with standing 1000V/DC/min, <0.5A.
C. Insulation Resistance: >500M Ω, 1000V./min
D. Contact Resistance: <20M Ω
2 Mechanical:
A. Cable-to-Plug tensile strength-20LBs(89N)min.
B. Durability: 750 mating cycles.
3 Operation Temperature: -20℃～+80℃.
4. Environmental compliance
A. the profucts are compliant with the RoHS, and REACH ETC.
5. Safety standards: UL E239590

特征:
1 電氣特性:
A. 额定电压150伏特AC. 额定电流1.5A
B. 耐電壓測試: 小于0.5安培1000伏特DC/一分鐘.
C. 絶緣抗陰: 1000伏特DC/一分鐘, 大于500百萬歐姆
D. 按觸陰坑: 不大于20m Ω (毫歐姆)
2 機械特性:
A. 拉力測試-電纜至插座張力強度至少一分鐘20磅 (89N)
B. 耐力測試-拔插測試750次以上.
3 使用温度范围: -20℃～+80℃
4 环保符合性:
A. 产品符合RoHS, REACH等环保规格.
5 安全标准: UL E239590

Boost Connect

品名规格 DESCRIPTION	8P8C-六类屏蔽单排通孔水晶头				页次 SHEET	1/1
产品编号 PRODUCT NO	101778	单位 UNIT	mm	比例 SCALE	1:1	版本 EDITI	A/0

铜片规格		胶壳 PA66(尼龙料) ☐94-V0 ●94-V2	1	DIMENSION IN mm(Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED	第三视角法 THIRD ANGLE PROJECTION	制图 DRAWN	王辉	日期 DATE	2023.02.10
		金片 (PIN针) Contacts ●黄铜 Brass ☐磷铜 Phosphor copper		x.x ±0.2		核对 CHECK	李勇波	日期 DATE	2023.02.10
		☐G/F" ☐1u" ☐3u" ☐6u" ☐15u" ☐30u" ☐50u" ☐S"	8	x.xx ±0.1 x.xxx ±0.05		批准 APPRO	夏赞华	日期 DATE	2023.02.10