


Technical Requirments for:

8 Wires Control cable

1114

8 wires for example:

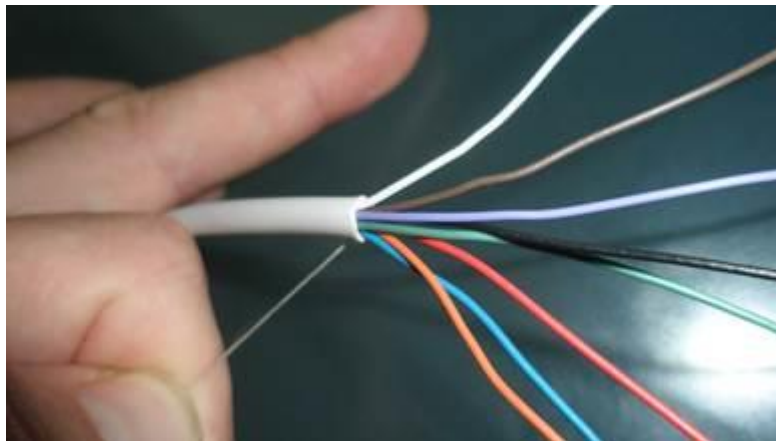

Description of 8 wires control cable (Stranded):

1. 8 wires. 24AWG Not twisted (parallel)
2. Colors : red, black, blue ,brown ,green, white ,orange, purple
3. Conductor: CCA ,stranded 7*0.254m
4. Diameter Insulation per conductor : 1.35 mm
5. Jacket thickness 0.7 mm.
6. Jacket OD 5 mm.
7. Max V = 440VAC.
8. Max A = 1A.
9. Max Temp = 70°C.
- 10.Strong rip cord.
- 11.200 meter per roll on a paper drum

Detailed Information
1. Inner box's Logo: BoostWires
2.Outer box's Logo: BoostWires
3.Cable Color: White
4.Cable Printing BoostWires 1114 control cable 8 wires 001-200m ;

Print on each Plastic roll:

BoostWires 1114
Control cable 8 wires

8. Outer carton box information,

 C/NO.:	Control cable 8 wires 200m P/N: RBS-1114 QTY: 4 PC / CTN G.W: KG N.W: KG	 C/NO.:	Control cable 8 wires 200m P/N: RBS-1114 QTY: 4 PC / CTN G.W: KG N.W: KG