
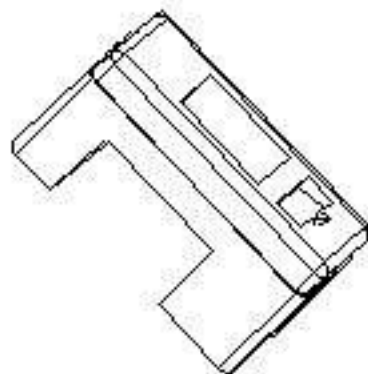

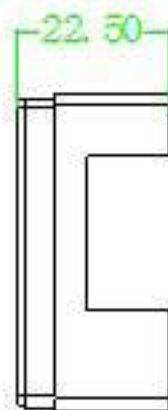


APPROVAL SHEET

公司名称 Company's name	
产品名称 Product Name	超 5 类网络连接器 塑膠外殼 Plastic Frame Socket
型号 Model	RBS-1138

出厂签章 (EX FACTORY APPROVALS)				
核准 APPROVED BY	审核 CHECKED BY	品管部 Q.A.	工程技术部 ENGINEERING	
吴周红	吴庄章	陈家春	车叶飞	
客户确认 (customer confirmation)				
	核准 APPROVED BY	审核 CHECKED BY	品管部 Q.A.	工程技术部 ENGINEERING
接受 accept				
驳回 reject				
说明(Description):				

日期(Date): 2013-02-11

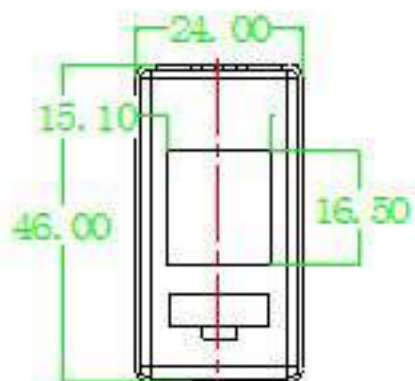

80-100	0.5
50-80	0.43
30-50	0.32
18-30	0.25
10-18	0.19
3-10	0.14
0-3	0.1
未注角度公差	1

标记处更改文件号 会 签 日期

设计	标准化	阶段标记	重量	比例
制图	工艺	A0		2:1
审核	会签			
校对	批准	第 页 共 页		

型号(Model No.)		产品名称 Descrip.	超 5 类网络连接器塑膠外殼 Plastic Frame Socket
1. 额定值(rated value) 1.1 额定电压(The rated voltage) 30V 1.2 额定电流(Rated current)20mA 2 使用环境条件conditions 2.1 环境温度(temperature): -23——+42℃ 2.2 相对湿度(humidity): ≤95 % 3 结构尺寸：（见图纸） 4 技术特性 Technical characteristics 4.1 环境测试条件(test conditions): 4℃—36℃，湿度(humidity) 60-95%，标准大气压下。(Under normal atmospheric pressure.) 4.2 物理性能(Physical) 4.21 制造标准：依据国际标准 ISO/IEC11801；TIA/EIA568 设计制造。 According to the international standard ISO/iec11801and; TIA/EIA568 design and manufacture. 4.22 IDC：磷青铜，镀锡，适用线径为 0.4~0.6mm，寿命不小于 200 次。 IDC Phosphor bronze, tin, Apply to wire diameter is 0.4 ~ 0.6 mm, 4.23 线插针：磷青铜，镀金（25uinch），插头可重复插拔不小于 750 次 Pin: phosphor bronze, gold plated , the plug can be inserted is not less than 750 times 4.24 面板材质为阻燃ABS，可通过V-0 级别 阻燃测试 The socket is made from V-0 material, And it can pass the fire resistance test 4.25 标识：标识完善、清晰 Marks: perfect and clear			