


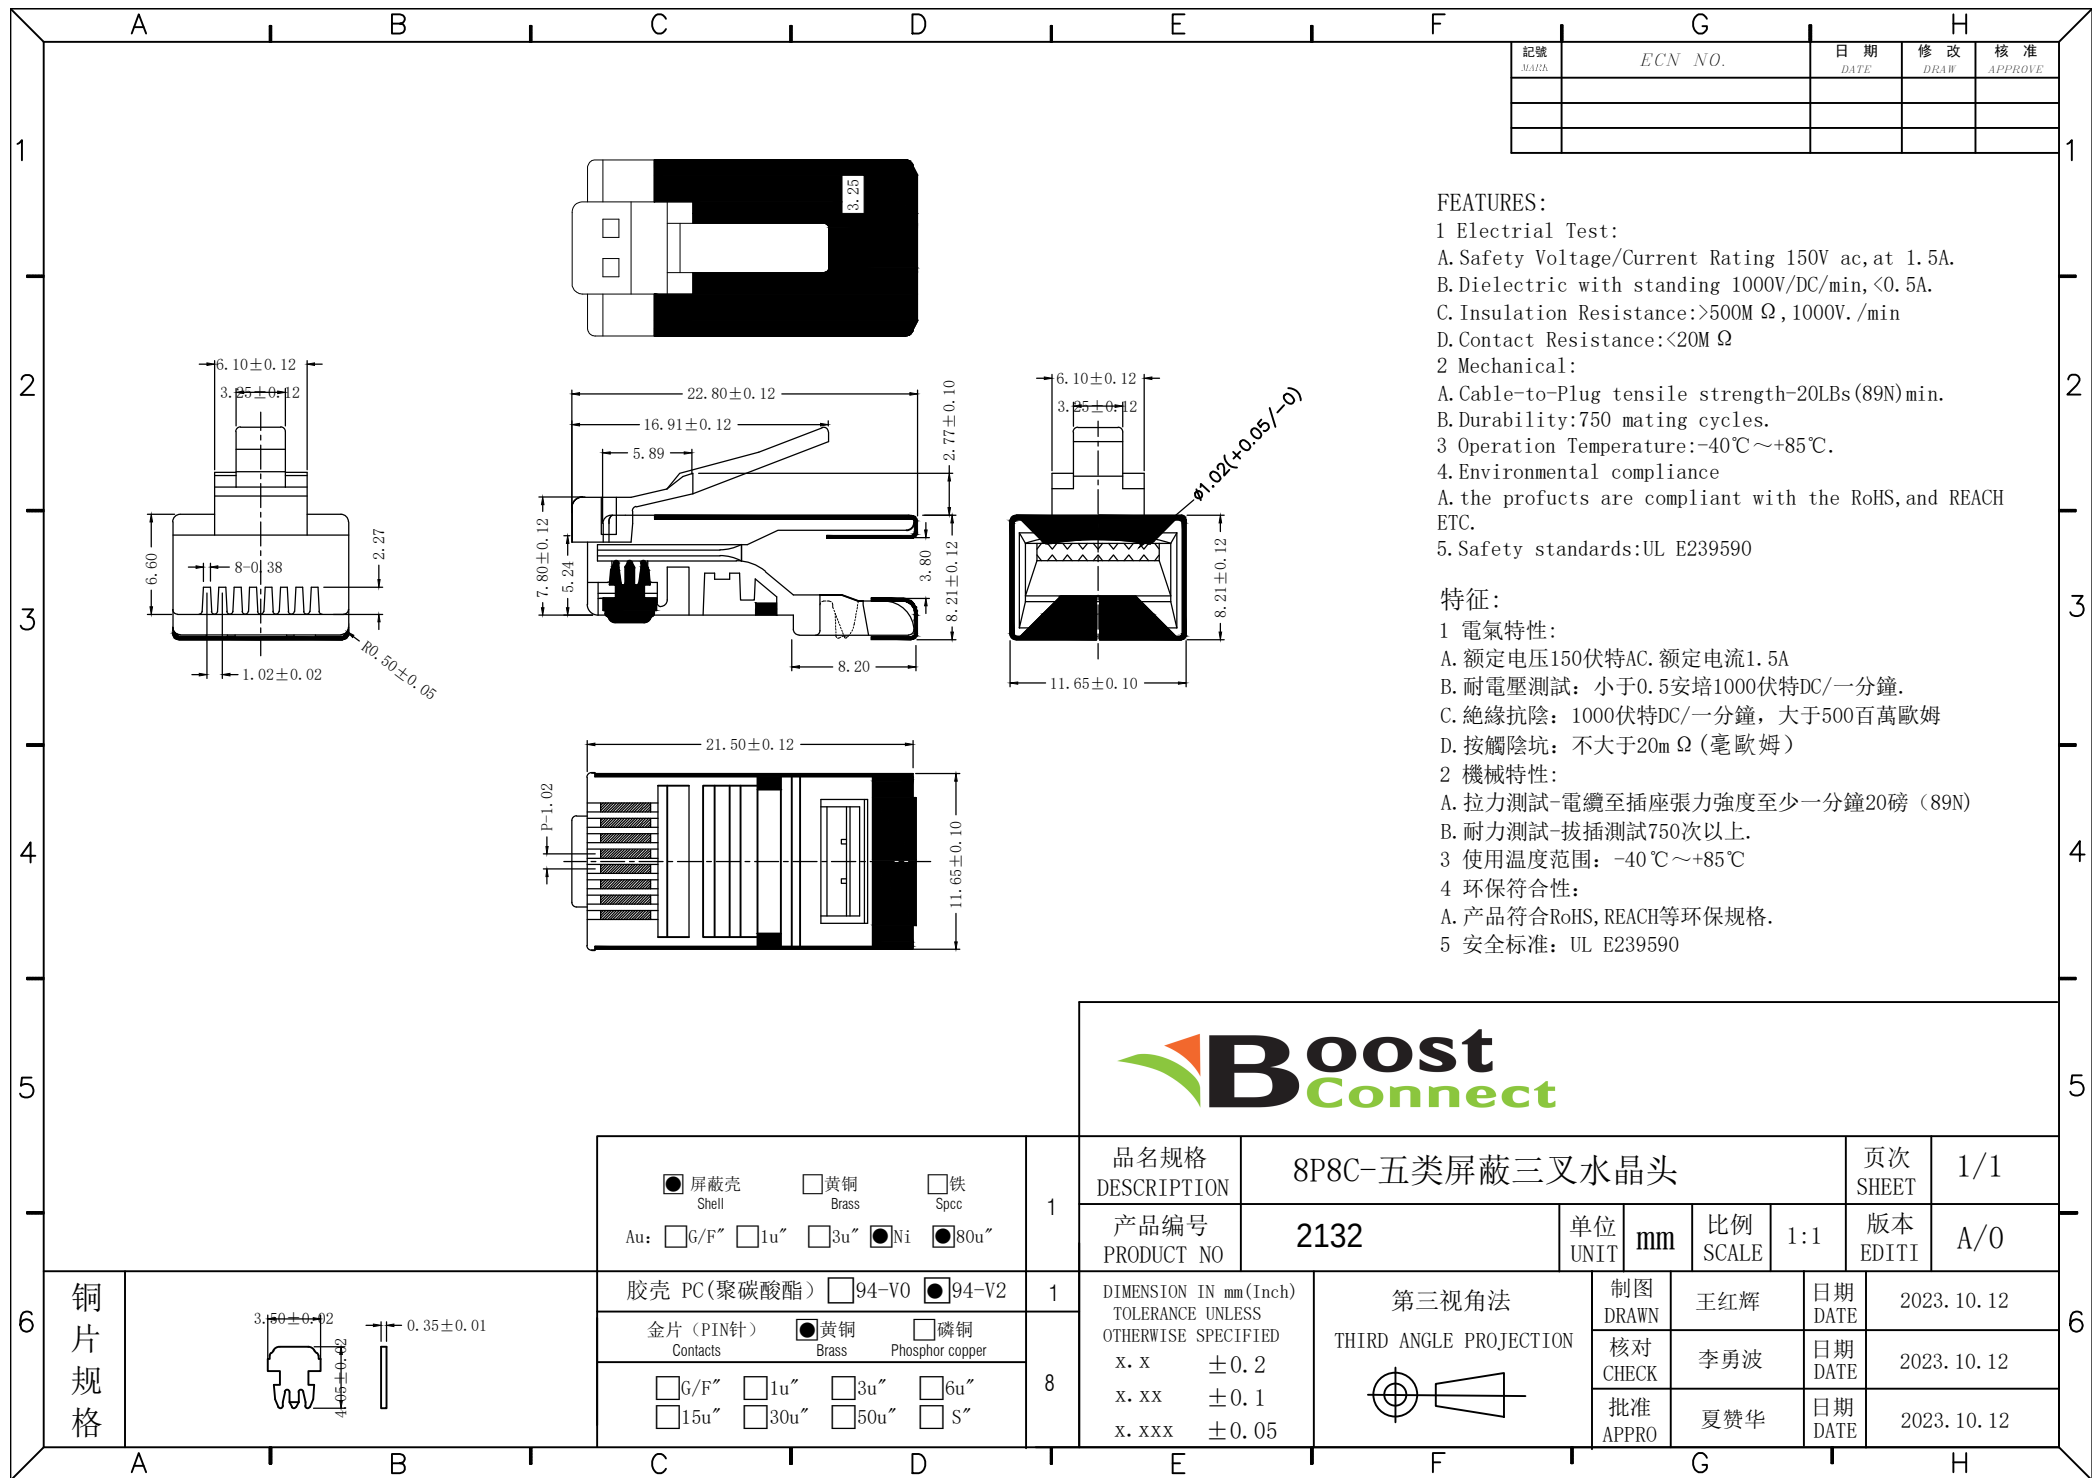

記號 MARK	ECN NO.	日期 DATE	修改 DRAW	核准 APPROVE

FEATURES:

1 Electrical Test:

- A. Safety Voltage/Current Rating 150V ac, at 1.5A.
- B. Dielectric with standing 1000V/DC/min, <0.5A.
- C. Insulation Resistance: >500M Ω , 1000V./min
- D. Contact Resistance: <20M Ω

2 Mechanical:

- A. Cable-to-Plug tensile strength-20LBs (89N) min.
- B. Durability: 750 mating cycles.
- 3 Operation Temperature: -40°C ~ +85°C.
- 4. Environmental compliance
- A. the products are compliant with the RoHS, and REACH ETC.
- 5. Safety standards: UL E239590

特征:


1 电气特性:

- A. 额定电压150伏特AC. 额定电流1.5A
- B. 耐电压测试: 小于0.5安培1000伏特DC/一分钟.
- C. 绝缘抗阻: 1000伏特DC/一分钟, 大于500百萬歐姆
- D. 接觸陰坑: 不大于20m Ω (毫歐姆)

2 机械特性:

- A. 拉力测试-電纜至插座張力強度至少一分钟20磅 (89N)
- B. 耐力测试-拔插测试750次以上.
- 3 使用温度范围: -40°C ~ +85°C
- 4 环保符合性:
- A. 产品符合RoHS, REACH等环保规格.
- 5 安全标准: UL E239590



☒屏蔽壳 Shell ☐黄铜 Brass ☐铁 Spcc		1	品名规格 DESCRIPTION		8P8C-五类屏蔽三叉水晶头				页次 SHEET		1/1	
Au: ☐ G/F" ☐ 1u" ☐ 3u" ☒ Ni ☒ 80u"			产品编号 PRODUCT NO		2132		单位 UNIT	mm	比例 SCALE	1:1	版本 EDITI	A/0
胶壳 PC(聚碳酸酯) ☐ 94-V0 ☒ 94-V2		1	DIMENSION IN mm(Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED x. x ±0.2 x. xx ±0.1 x. xxx ±0.05		第三视角法 THIRD ANGLE PROJECTION 		制图 DRAWN	王红辉	日期 DATE	2023. 10. 12		
金片 (PIN针) ☒ 黄铜 ☐ 磷铜 Contacts Brass Phosphor copper		8					核对 CHECK	李勇波	日期 DATE	2023. 10. 12		
☐G/F" ☐1u" ☐3u" ☐6u" ☐15u" ☐30u" ☐50u" ☐S"							批准 APPRO	夏赞华	日期 DATE	2023. 10. 12		

屏蔽壳
Shell
Au: ☐ G/F" ☐ 1u" ☐ 3u" ☒ Ni ☒ 80u"

黄铜
Brass

铁
Spcc

胶壳 PC(聚碳酸酯) ☐ 94-V0 ☒ 94-V2

金片 (PIN针)
Contacts
☒ 黄铜
Brass ☐ 磷铜
Phosphor copper

☐ G/F" ☐ 1u" ☐ 3u" ☐ 6u"
☐ 15u" ☐ 30u" ☐ 50u" ☐ S"

铜片规格

