

Specification Sheet

BNC Assembling Connector Suitable For RG59 Coaxial Cable

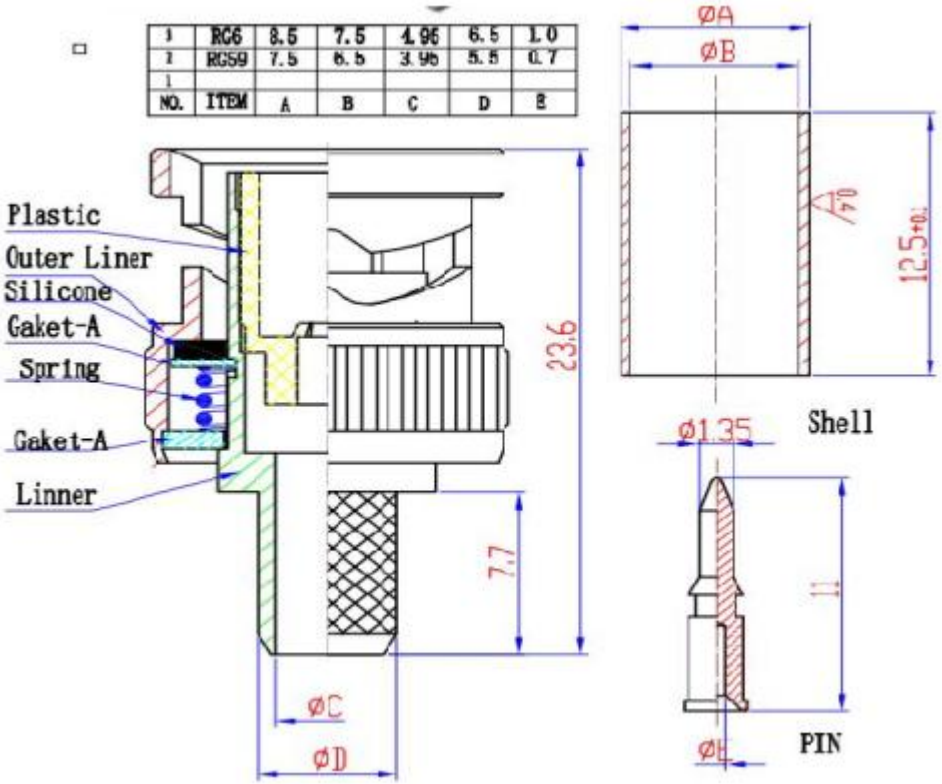

Dimensions are in millimeters Unmarked tolerance ±0.05mm

PN: 2185

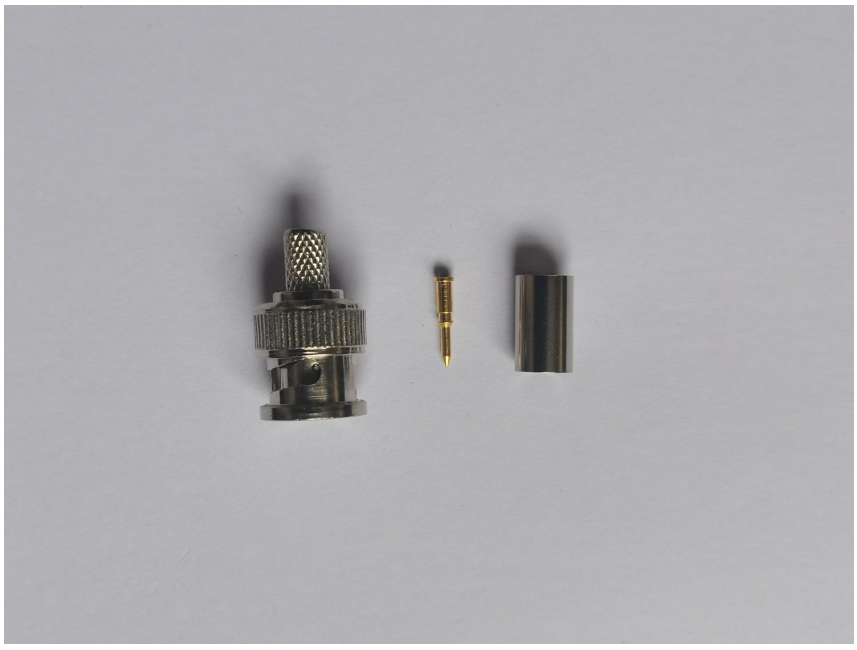

RBS TELECOM LTD E-mail: Pavel@RBS-Telecom.com

Specification Sheet









Packing Information:

100 sets/plastic bag, 5bags/small box , 5 boxes/carton

2000pcs/ctn

Carton size: 44*37*16 cm

N,W.: 20kgs G.W.:22kgs

RBS TELECOM LTD **E-mail:** Pavel@RBS-Telecom.com

Specification Sheet

Electrical Characteristics

Bandwidth	0 MHz to 3 GHz
Impedance	75 Ohms(Nominal)
Return Loss	Minimum-30 dB to 3 GHz
Shielding Effectiveness	>-100 dB to 3.0GHz
Insertion Loss	≤ 0.20Db @ 3GHz
Operating Voltage	90 V(at 60 Hz continuous AC)
Operating Temperature	-40°F to +140°F ,-40°C to +60°C
Cable Range	Coaxial Cable RG59
Cable Retention	>40 lbs .(22.68kg),Ambient Temperature
Cable Insertion	<15 lbs, maximum insertion force , Ambient Temperature

Physical Characteristics

Length	0.93in（23.6mm））
Mating Mechanism	7/16 Hex 3/8 -32 UNEF Threading
Construction Material	Nickel plated brass　PIN Silver Plated

RBS TELECOM LTD　　**E-mail:** Pavel@RBS-Telecom.com