RBS TELECOM

Product Technical Specification

RG59 CCTV Coaxial Cable + 2 Power Cable

PN: 2207





Printing on the cable:

BoostWires HQ 2207F RG59BU CCTV Cable 75Ω & 2DC wire 001m FR

Packing : 100m plastic drum*4/ctn


N.W.: 22.5kgs

G.W.: 24.5kgs

Master Carton Meas: 46*23*46cm

Boost Wires **RBS TELECOM**

Label on drum :

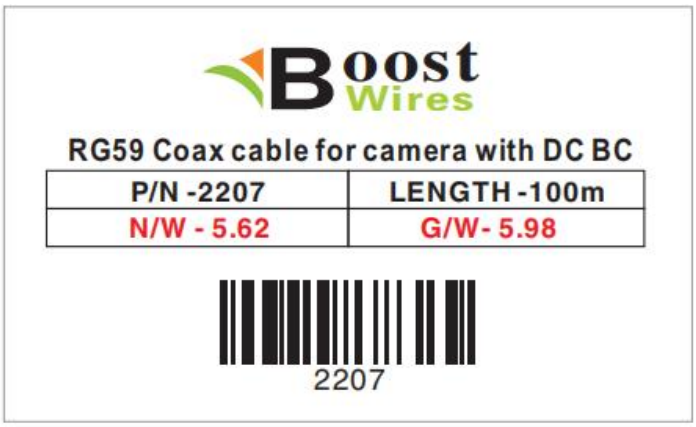

Master Carton :



Boost Wires RBS TELECOM

Technical Parameter

Items		Proposed Specification
PN:2207	RG59BU CCTV Cable 75Ω & 2DC wire Black Sheath	
Center Conductor		
Material		Pure Copper
Nominal Diameter		0.61 mm ±0.02mm
Dielectric : Solid PE		
Nominal Diameter Over Dielectric		3.8 mm ± 0.15mm
Shielding		
1st Shield	Imitation Copper Foil (Golden Color AL-Polypropylene Laminated Tape)	
2nd Shield	112*0.12±0.01mm CCA (Copper Clad Aluminum) wire 60% Coverage	
Power cable		
Conductor	Material	Copper Clad Aluminum
	Nominal Diameter	16*0.2mm± 0.02mm
Dielectric	Material	PE
	Color	Red & Black
	Nominal Diameter	1.6mm± 0.15mm
Jacket		
Material		PVC
NOMINAL DIAMETER OVER JACKET		(6.0 + 4.0)± 0.15mm
Electric Performance		
Impedance (Ω)		75±5
Capacitance (Pf/m)		67±3
Velocity (%))		66±2
Attenuation (A) : @ testing temperature : 20 ℃		
Frequency (MHz)		Max dB/100m (dB)
10		3.80
50		6.20
100		12.30
200		17.60
400		25.60
800		37.60
1000		42.30