

AE-DF7351-K2-降压线(海外标配)(MINI-K2)

Buck line



- Line length : Input line 1.3m, output line 2.1m
- Wire specification : VIN3-core 17/0.15 2C yellow black 7/0.15 1C red
- Input requirements : Rated input voltage DC:12-24V Maximum input current $\geq 2A$
- Type of output : No-load output voltage DC:5.0V-5.3V
- Low power protection 11.3V $\pm$ 0.2v


▪ Specification

Interface	
Power Interface	Mini left
General	
Power Supply	DC : 12-24V , 2A
Working temperature	-20 °C to 65 °C
Working humidity	95%(Max)

▪ Available Model

AE-DF7351-K2-降压线(MINI-K2)

▪ Dimension

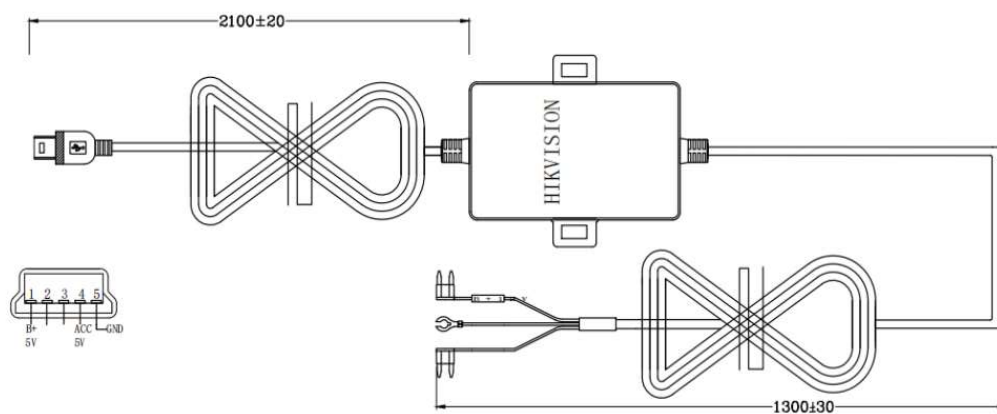

▪ Accessory



AE-DC5113-F65



Hi-D32F6/G



AE-DC5013-F6PRO



AE-DC2015-B1



AE-DC5313-C6



AE-DC5313-C6PRO



AE-DC5013-F6



AE-DC8012-C8



Hi-D20B1



AE-DC5013-F6S

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq