


Presentation

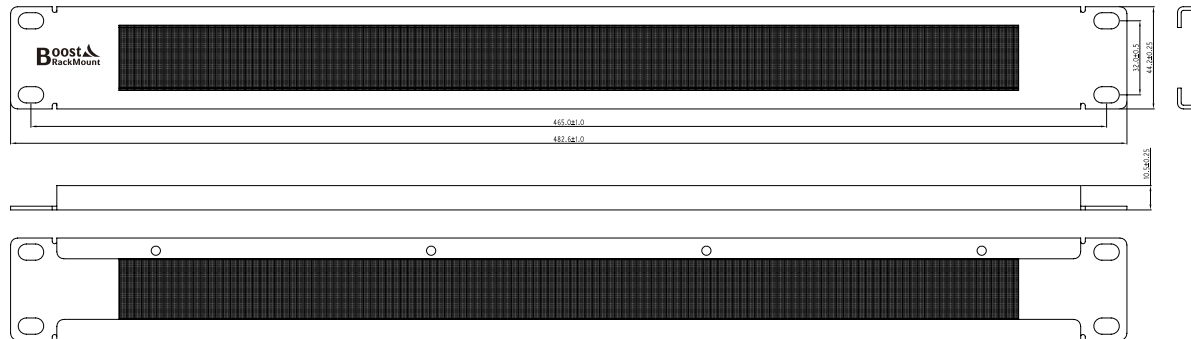

NOTES:

ENVIRONMENTAL:

1. Operating temperature range :-10°C-+60°C
2. Storage temperature range :-40°C-70°C
3. Operating humidity range:10%-90%

MECHANICAL:

1. Front Fram: Cold-rolled stell, SPCC,T=1.5mm, with plastic powder plating, RAL9004

Photo

