





NOTE:  
1.Key dimension with \* must be meet.  
2.Wire: 53RVV H05VVH2-F 2×0.75mm² /VDE/Steel seal/Black/OD:4.0\*6.4  
3.Total lenght: 1500±15mm.  
4.Plug:External model&DT-201 VDE 2.5A 250V~  
5.Pressure resistance test: Internal pressure:3000V/S; External pressure: 4000V/S; Leakage current:0.5mA, No breakdown, flashover, mispolarization and other defective phenomena of the wire.  
6.The appearance of the wire is clean and tidy, the plug is not shrunken, filled with glue or lack of glue, molded seams are not phi, the wire is not scratched, the printing is not clear, heavy shadow, lack of words and other undesirable phenomena.  
7.Packaging requirements: Tie wires as per drawing, 10 wires per tie, packed in boxes

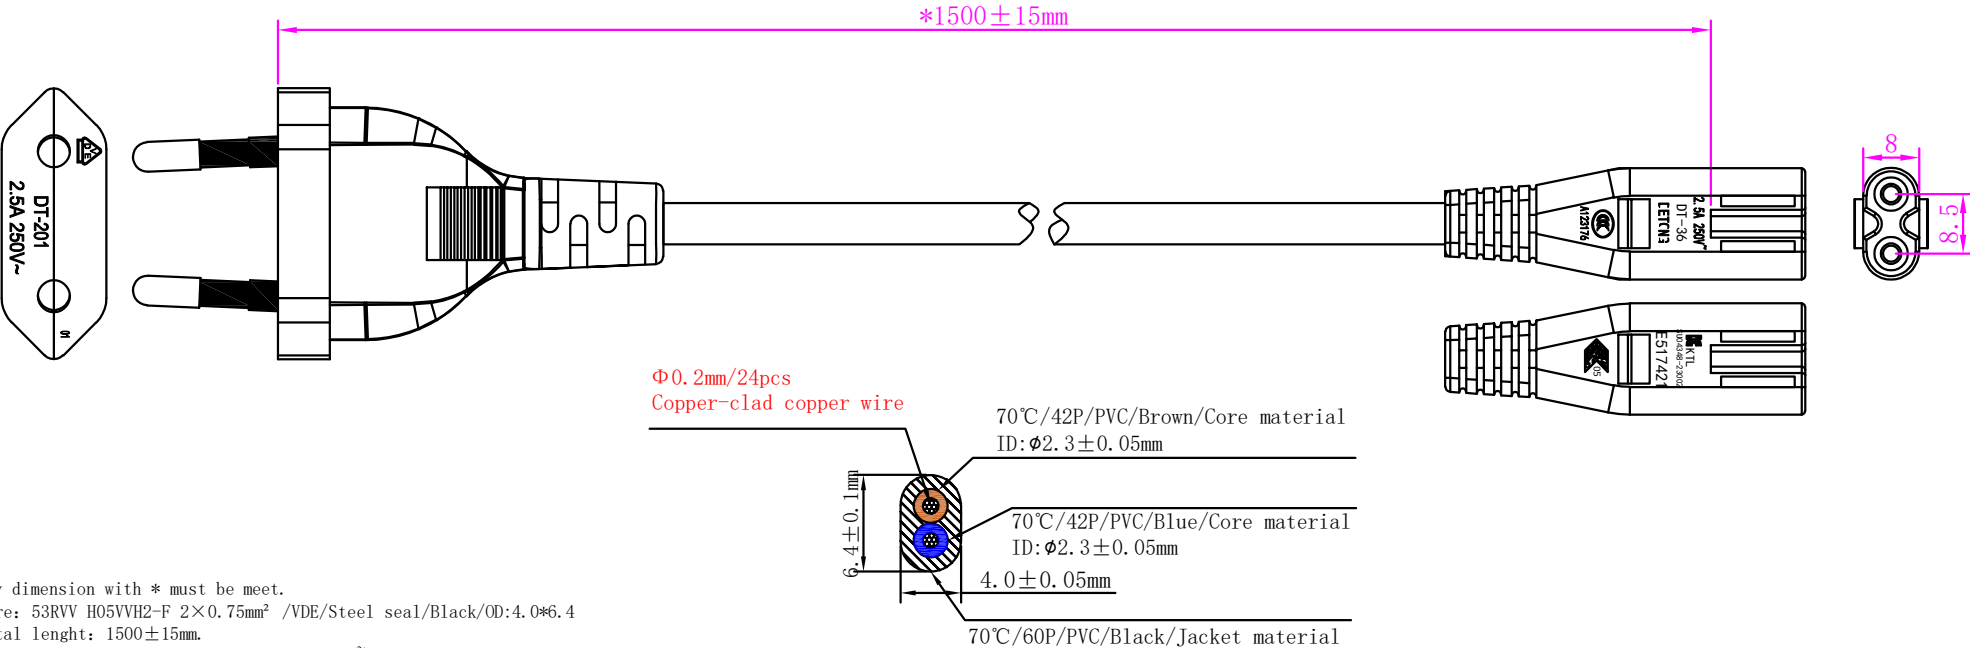

|                |            |                                                            |                                              |      |        |
|----------------|------------|------------------------------------------------------------|----------------------------------------------|------|--------|
| 4              | 0303060009 | 70°C environmental protection plug material 1.48 black 50P |                                              | KG   | 0.0234 |
| 3              | 0003040039 | C7                                                         |                                              | PCS  | 1      |
| 2              | 0003040019 | Euro 2.5A two-plug internal frame                          | Black&One-piece&solid                        | PCS  | 1      |
| 1              | 0103000092 | 53RVV H05VVH2-F 2×0.75mm² Black                            | OD: 4.0*6.4<br>24/0.2Copper-clad copper wire | M    | 1.5    |
| No.            | P/N code   | Material Name                                              | Material specification                       | Unit | Amout  |
| Drawing change |            |                                                            | Bill OF BOM                                  |      |        |

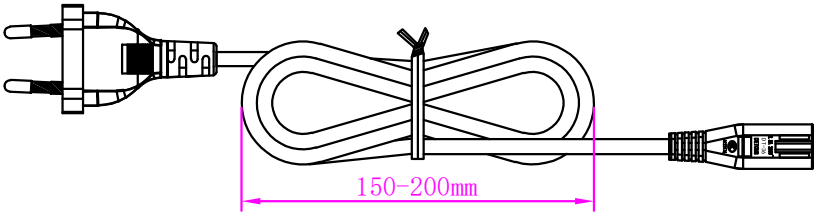

|               |             |                                                                                   |            |       |          |
|---------------|-------------|-----------------------------------------------------------------------------------|------------|-------|----------|
| Customer Name | RBS         | Description: Euro 1.5m 2.5A two-plug internal frame +53RVV H05VVH2-F2A-0.75mm²+C7 |            |       |          |
| Customer P/N  | 14200006    | P/N                                                                               | 0105020376 | Model |          |
| Drawn by      | Wanrou Liao | DWG. No                                                                           | DT-RBS-006 |       |          |
| Check by      |             | Sheet                                                                             | 1:1        | Date  | 2024/7/9 |
| Approved by   |             | Unit                                                                              | mm         | RoHS  |          |